

HA12-7.5C



Specification


Cells Per Unit	6
Voltage Per Unit	12
Nominal Capacity	7.5Ah@20hour-rate to 1.60V per cell @25°C
Weight	Approx. 2.22 Kg (Tolerance ± 4.0%)
Internal Resistance	Approx. 21.0 mΩ
Terminal	F2
Max. Discharge Current	72A (5 sec)
Short Circuit Current	260A
Design Life	5 years (Float charging) EUROBAT
Recommended Maximum Charging Current	2.25 A
Reference Capacity	C3 5.80AH C5 6.35A C20 7.50AH
Standby Use Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~15 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -15°C~50°C Charge: -10°C~50°C Storage: -20°C~50°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



HA series C is a general purpose battery with 5 years design life in float service, (EUROBAT GUIDE). It meets with IEC, JIS, BS and YDT standards. With advanced AGM valve regulated technology and high purity raw material, the HC series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



Dimensions

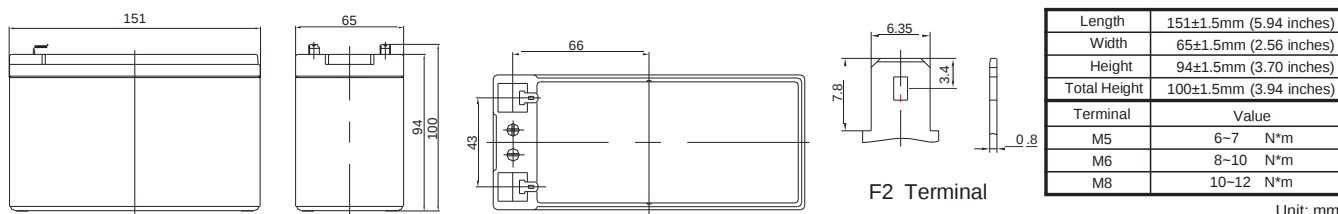


Constant Current Discharge Characteristics : A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	28.55	18.62	13.73	7.948	4.593	2.710	1.970	1.569	1.324	0.885	0.721	0.375
1.65V	27.52	18.06	13.37	7.774	4.508	2.670	1.944	1.549	1.309	0.876	0.714	0.372
1.70V	26.17	17.33	12.90	7.543	4.395	2.617	1.909	1.523	1.288	0.864	0.705	0.368
1.75V	24.45	16.39	12.29	7.241	4.247	2.548	1.863	1.489	1.261	0.848	0.693	0.363
1.80V	22.28	15.19	11.49	6.850	4.053	2.456	1.802	1.443	1.226	0.827	0.676	0.355
1.85V	19.60	13.69	10.49	6.350	3.804	2.336	1.722	1.384	1.179	0.799	0.655	0.346

Constant Power Discharge Characteristics : WPC (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	49.13	32.12	24.37	14.65	8.72	5.21	3.82	3.06	2.59	1.75	1.44	0.75
1.65V	48.62	31.99	24.23	14.55	8.64	5.17	3.79	3.03	2.57	1.74	1.43	0.74
1.70V	46.76	31.04	23.58	14.19	8.46	5.09	3.73	2.99	2.54	1.72	1.41	0.74
1.75V	44.47	29.89	22.78	13.77	8.21	4.97	3.66	2.93	2.49	1.69	1.39	0.73
1.80V	41.22	28.18	21.61	13.15	7.88	4.82	3.55	2.85	2.43	1.65	1.36	0.71
1.85V	36.92	25.84	20.01	12.31	7.45	4.61	3.41	2.75	2.35	1.60	1.32	0.70

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

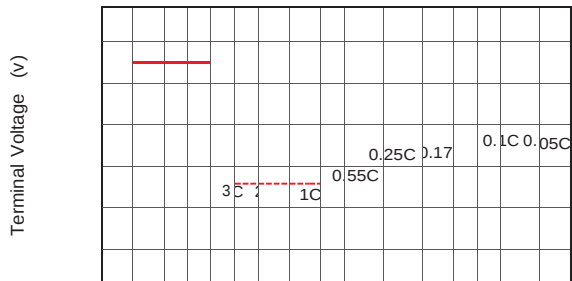


Charge Volume (%)


Charge Current (CA)

Charge Voltage (VPC)


Cycle Life In Relation To Depth Of Discharge

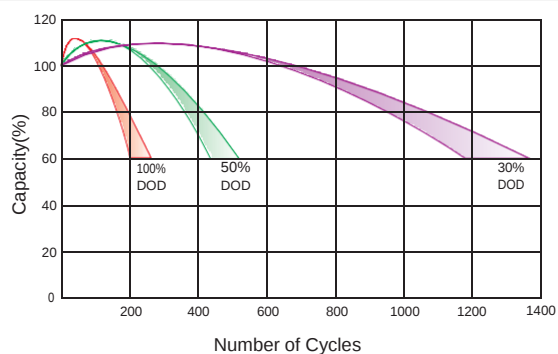


Relationship Between Charging Voltage And Temperature

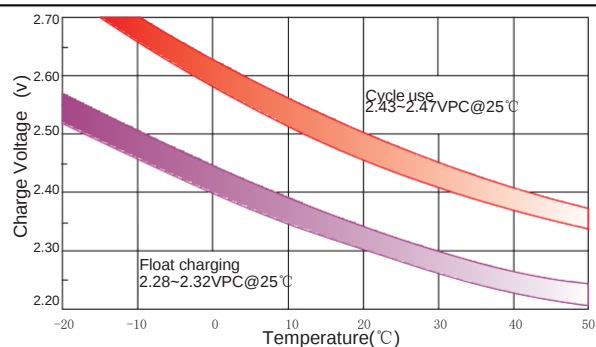


Temperature Effects On Capacity

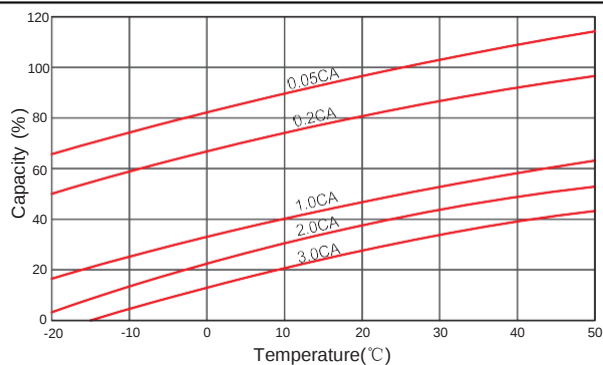


Storage Characteristics

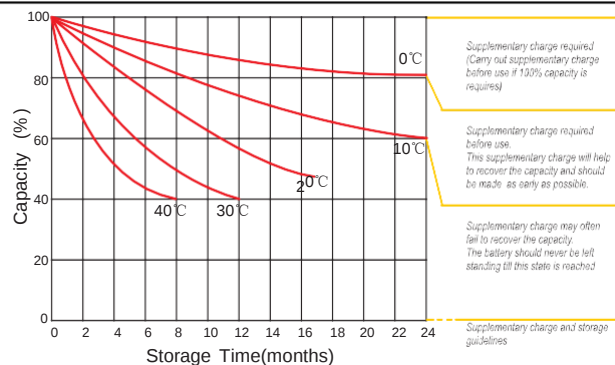

Effect Of Temperature On Long Term Life

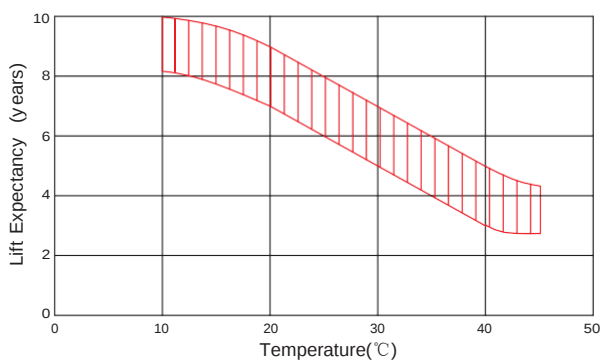

Life Characteristics Of Standby Use

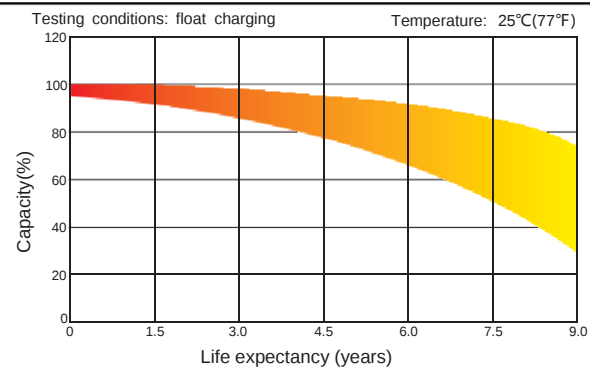

(Note) All above information shall be changed without prior notice, We reserves the right to explain and update the latest information.